

MSDP-500

DISPLAYPORT (5 Port) Signal Generator


IMAGE



DEFINITION

- MSDP-500 supports a certified **Displayport 1.1a Version** Signal and output signal to the five(5) channels.
- It is also supports 2Ch audio.

DIAGRAM

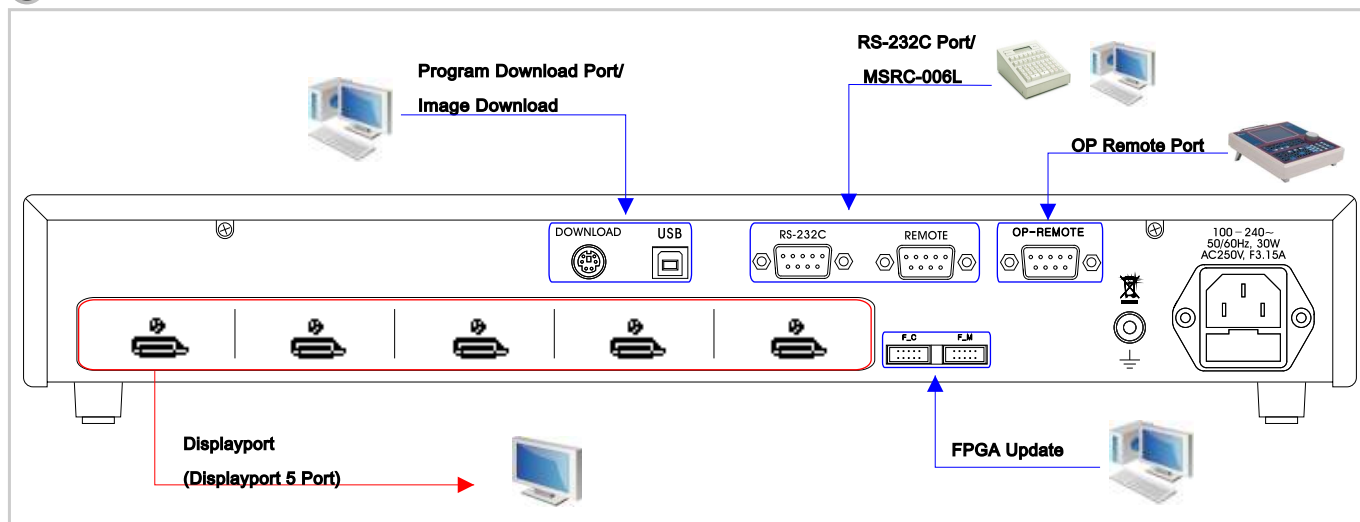

SPECIFICATION

Displayport	Display Size	2560 x 1600
	Pixel Clock	Max 10.8Gbps (2.7GHz-1,2x4 Lanes / 1.6GHz-1,2,4 Lanes)
	Link Rate	25~268.5MHz
	Input Format	RGB444, YCbCr444, YCbCr422 (8,10Bit) *12Bit - YCbCr422 only
	Compliant	Displayport 1.1a Version
	Audio	SPDIF, 192KHz, 2Channels
General Specification	Power Consumption	AC 100~240VAC, 50/60Hz Auto Switch
	Operating Conditions	Temperature : 0~ 40℃ 80% Humidity, Non-condensing
	Dimension(WXDXH)	300 X 280 X 80mm, Weight : 2.6Kg

* All specifications are subject to change without any notice.

Tel. 82-55-297-8880 / Fax. 82-55-256-7388

Address. #42-20, Palyong, Changwon, Gyeongnam, 641-847, Korea

Homepage. www.Ltdmaster.com

E-mail. sales@Ltdmaster.com / webmaster@Ltdmaster.com



Master Co., Ltd

Find Your Digital Solutions!