

MSHM-410A

4X10 HDMI Ver 1.4 Distributor


IMAGE



DEFINITION

- MSHM-410A, HDMI Distribution Amplifier, distribute 4 digital video input sources to 10 output channels. The built-in amplification function enables HDMI signal distribution without signal loss.
- The product guarantees to support full channels HDMI/HDCP compliance.
- User can select one input source of the four and make sure connected condition with led of the front panel.

DIAGRAM

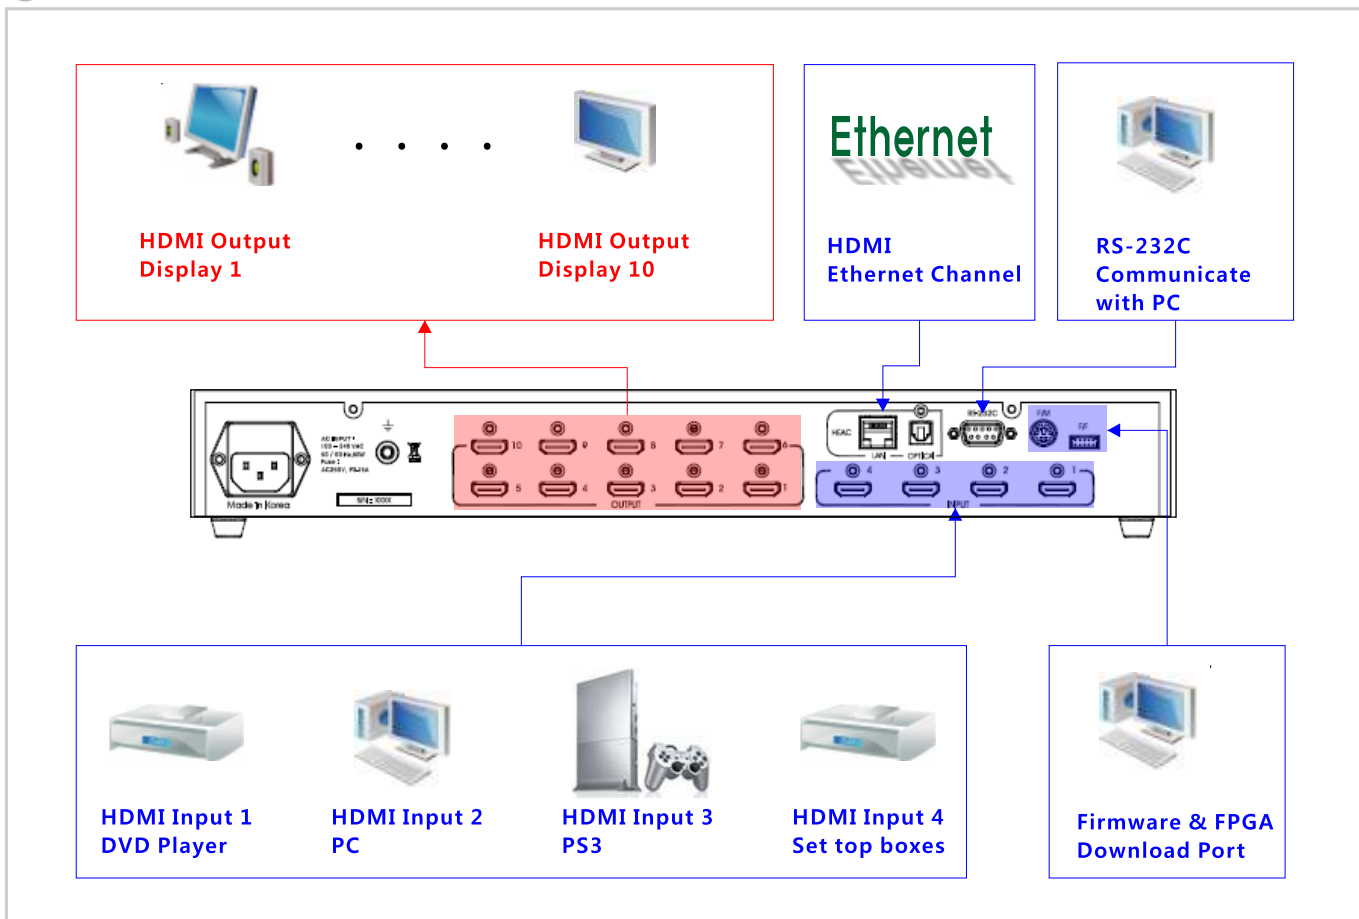

MSHM-410A

4X10 HDMI Ver 1.4 Distributor

SPECIFICATION

Input/Output Channel	Input : 4 Channels / Output : 10 Channels
Pixel Clock	25~165MHz (TMDS Clock : 25~225MHz)
Input/Output Connector	Type A Connector
HDMI Compliance	HDMI 1.4 Specification
Audio Sampling Frequency	Maximum 192KHz (8 Channels)
Resolution	* VGA, SVGA, XGA, UXGA for PC * 480i/p, 576i/P, 720i/p, 1080i/p for HDTV
Input/Output Signal	TMDS
Options	* Supports HDCP, EDID Mode setting, * Supports CEC ON/OFF Function * 3D Video Formats(Stereoscopic) * Audio Return Channel(ARC) & HDMI Ethernet Channel(HEC) through output 1 Channel
Power Consumption	AC 100~240VAC, 50/60Hz Auto Switch * Temperature : 0~40°C
Operating Conditions	* 80% Humidity, Non-condensing
Dimension(WXDXH)	430 X 250 X 55mm, Weight : 3.1Kg

* All specifications are subject to change without any notice.

Tel. 82-55-297-8880 / Fax. 82-55-256-7388

Address. #42-20, Palyong, Changwon, Gyeongnam, 641-847, Korea

Homepage. www.Ltdmaster.com

E-mail. sales@Ltdmaster.com / webmaster@Ltdmaster.com

Master Co., Ltd



Find Your Digital Solutions!