
MSHM-405S

HDMI Ver 1.4 Distributor

MAGE

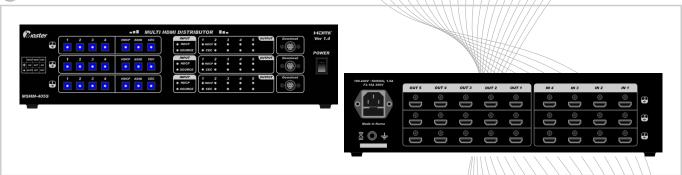

O DEFINITION

- MSHM-405S, HDMI Distributor, distribute four(4) digital video sources to the five(5) output channels.
- The built-in amplification function enables HDMI signal distribution without signal loss.
- The product guarantees to support full channels HDMI/HDCP compliance which means NEVER displaying HDCP certified sources in not-HDCP certified Tvs.
- User can select one(1) input source of the four(4) and make sure connected condition for HDCP & EDID test with led color of the front panel.

SPECIFICATION

	///%	
Input/Output Channel	Input: 4 Channels / Output: 5 Channels	_
Pixel Clock	25~165MHz (TMDS Clock: 25~225MHz)	_
Input/Output Connector	Type A Connector	
HDMI Compliance	HDMI 1.4 Specification	
Audio Sampling Frequency	Maximum 192KHz (8 Channels)	\prod
Resolution	VGA, SVGA, XGA, UXGA for PC	\prod
	480i/p, 720i/p, 1080i/p for HDTV	П
Input/Output Signal	TMDS (RGB 4:4:4 , YCbCr 4:4:4, YCbCr 4:2:2 8/10/12Bit)	П
Options	Supports HDCP, EDID Mode setting, Supports CEC On/Off Function	TI
	Supports 3D Video Formats (Side by Side(Half), Framepacking, Top&Bottom)	Π
Power Consumption	100~240VAC, 50/60Hz Auto Switch	7/
Operating Conditions	Temperature: 0~40℃	7,
	80% Humidity, Non-condensing	Ζ,
Dimension(WXDXH)	380 X 212 X 95mm, Weight: 3.8Kg	Z
* All and airing tions are authion	t to shange without any notice	7

^{*} All specifications are subject to change without any notice.

Tel. 82-55-297-8880 / Fax. 82-55-256-7388

Address. #42-20, Palyong, Changwon, Gyeongnam, 641-847, Korea

Homepage. www.Ltdmaster.com

E-mail. sales@Ltdmaster.com / webmaster@Ltdmaster.com

