
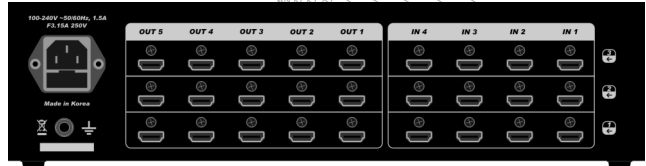


MSHM-405S

HDMI Ver 1.4 Distributor

IMAGE

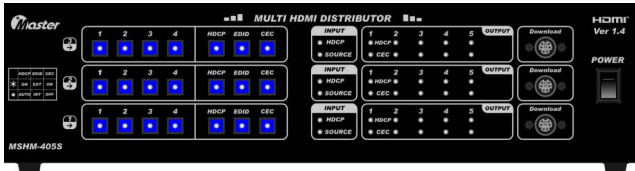

DEFINITION

- 본 기기는 네개의 HDMI(High-Definition Multimedia Interface) 신호를 입력 받아 디지털 영상&오디오를 다수의 HDMI 디스플레이 기기(프로젝터, PDP, HDTV, LCD)에 연결하는 시스템입니다.
- MSHM-405S는 고화질 디지털 영상&오디오 신호를 5분배하여 사용할 수 있는 장비입니다.

SPECIFICATION

Input/Output Channel	Input : 4 Channels / Output : 5 Channels
Pixel Clock	25~165MHz (TMDS Clock : 25~225MHz)
Input/Output Connector	Type A Connector
HDMI Compliance	HDMI 1.4 Specification
Audio Sampling Frequency	Maximum 192KHz (8 Channels)
Resolution	VGA, SVGA, XGA, UXGA for PC 480i/p, 720i/p, 1080i/p for HDTV
Input/Output Signal	TMDS (RGB 4:4:4, YCbCr 4:4:4, YCbCr 4:2:2 8/10/12Bit)
Options	Supports HDCP, EDID Mode setting, Supports CEC On/Off Function Supports 3D Video Formats (Side by Side(Half), Framepacking, Top&Bottom)
Power Consumption	100~240VAC, 50/60Hz Auto Switch
Operating Conditions	Temperature : 0~40℃ 80% Humidity, Non-condensing
Dimension(WXDXH)	380 X 212 X 95mm, Weight : 3.8Kg

* All specifications are subject to change without any notice.

전화. 055-297-8880 / 팩스. 055-256-7388

주소. 경남 창원시 팔용동 42-20번지 (우641-847)

Homepage. www.Ltdmaster.com

E-mail. sales@Ltdmaster.com / webmaster@Ltdmaster.com

Master Co., Ltd



Find Your Digital Solutions!